

BAND SLIM

USER MANUAL



1. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
2. No supplied water-proof box, installation should be advised by qualified professional.
3. The external flexible cable can not be replaced. If the cable is damaged, the luminaire should be discarded.

! Warning:


Confirm the correct connection method, incorrect connection can lead to improper work, and even damage.

If install wrong, it may fall off.

Refer to installation instruction for installing.

I. Product Introduction:

- The fixture is LED luminaire.
- Surface/Wall installation method.
- 6063#Aluminum Alloy,high clear tempered glass, Silicone waterproof sealed.
- Ingress production is IP66
- Electrical class: Class III

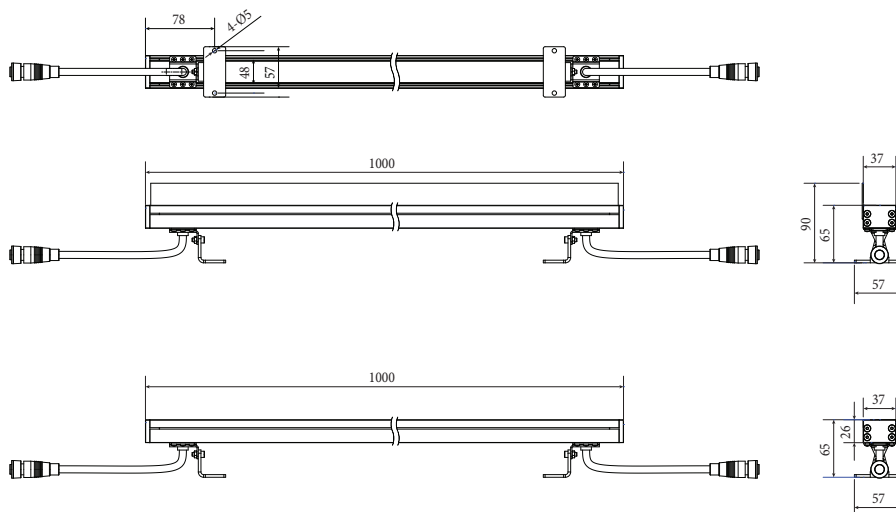

II. Technical specification:


Housing	Pressure die-cast aluminum alloy with polyester powder paint.
Glass	Tempered glass, 3mm
Housing color	RAL, metallic
Color Temperature	3000K - 6000K, RGBW
Control system	DMX-512, DALI, 1-10V
IK	07
IEC protection classes	III class (SELV)
Input voltage	220V
Ingress Protection Rating	IP66
Color rendering index	CRI >80
Operating temperature	-35°C ~ +55°C
Guaranteed lifetime	>50 000h

III. Observe the following dos and don'ts

1. Install in the IP 66 environment or beneath the IP66.
2. Prohibit punching any position of lamps
3. Please turn off the power and contact the dealer for problems in connection or other abnormal cases.
4. Installed by the qualified electrician holding a certificate.
5. Prohibit operating the lamps beyond the voltage scope as nation stipulated
6. Don't make the external power cable exposed during wiring.


IV. Installation Instructions

1. According to step 1, fix the bracket on the mounting surface with screws.

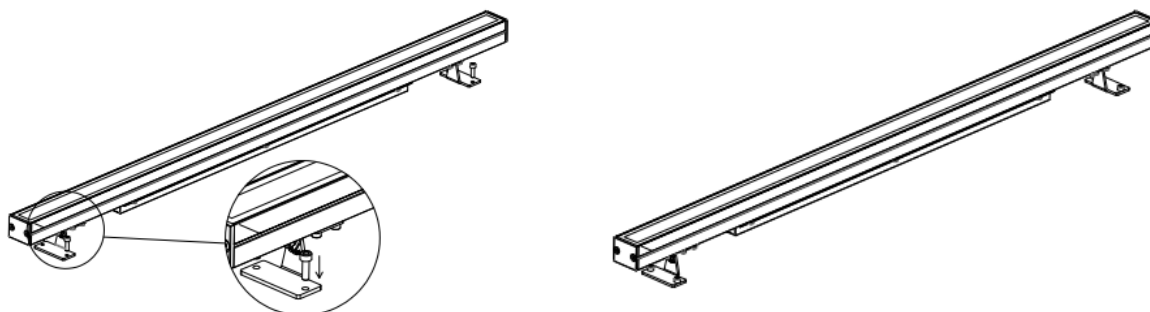

Step 1

2. According to step 2, To adjust the fitting as final requests.

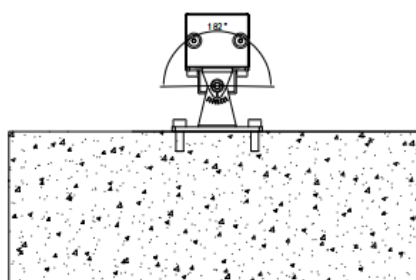

Step 2

Notes

The buried barrel must get reliable connection with the lamp body, any screws in the lamps should not be arbitrarily loosed. There is no special requirement on the installation depth.

VI. Remarks for the cables.

When you get the fixture, please check and find the relative version and confirm its Color Temperature, Electrical class, the cable out.

Attention: ■ When you get the fixtures is class III, please use a transformation to light.
 ■ When you get the RGB DMX512 fixture, please accurately connect the DMX cables, otherwise, it will influence the regular work.

Cables out for different color temperature and eletrical class			
v Version 1		x Version 2	
Single color v WW x CW		x RGBW (DMX-512)	
x Class I	L, N, E	Class III	Power cable: 2pin1 V+/Red wire; V-/Blue wire
Class III x DC36V v DC24V x DC12V	V+/Red wire V-/Blue wire	x DC36V x DC24V x DC12V	DMX IN cable: 3pin1 DMX+ Red wire DMX- Blue wire GND Green wire