



BORES ULTRALIM PRO OPAL

USER MANUAL



1. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
2. No supplied water-proof box, installation should be advised by qualified professional.
3. The external flexible cable can not be replaced. If the cable is damaged, the luminaire should be discarded.

DRAWING:

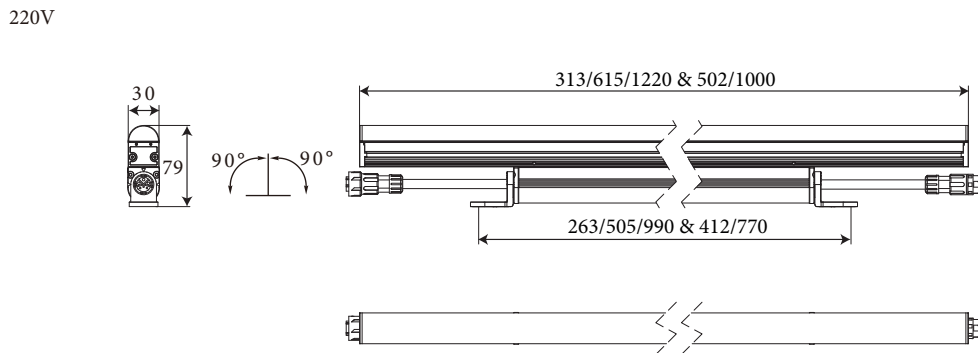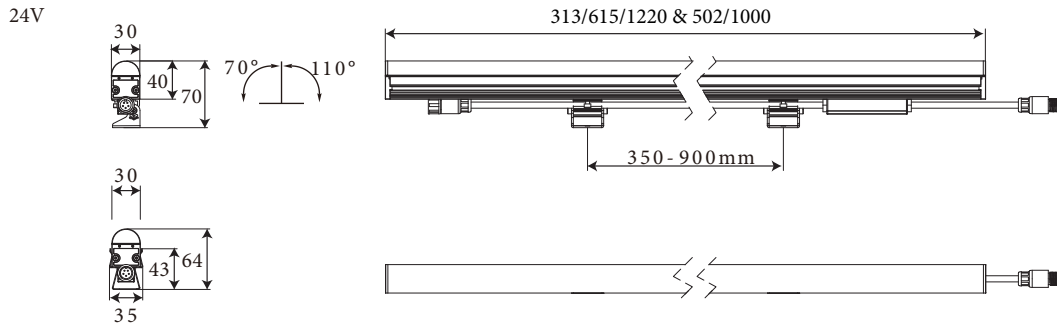

INSTALLATION:

1. Steady Color Mode: Directly connect outside power supply (pay attention to the matchable of connectors).
2. DMX Mode: work with DMX controller (off-line or on-line)

CAUTIONS:


1. Do not plug them into power when the product is still in package;
2. Don't use anything to cover the fixture during application;
3. Don't use this product in close environment;
4. If this product appears to be damaged, do not attempt any repair, please contact your dealer.

*Pls twist the connector well in order to avoid water going side and making fixture failure.

CONNECTION DRAWING

1. Steady color connection:

24VDC type:

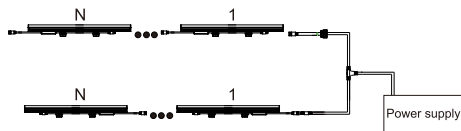

100~277VAC type:




2. DMX Control connection:


Signal Max. connection is 40 pcs fixture every port, if over 40 pcs, then signal splitter or use same DMX address for all lights.

3. DMX mode:

24VDC type:

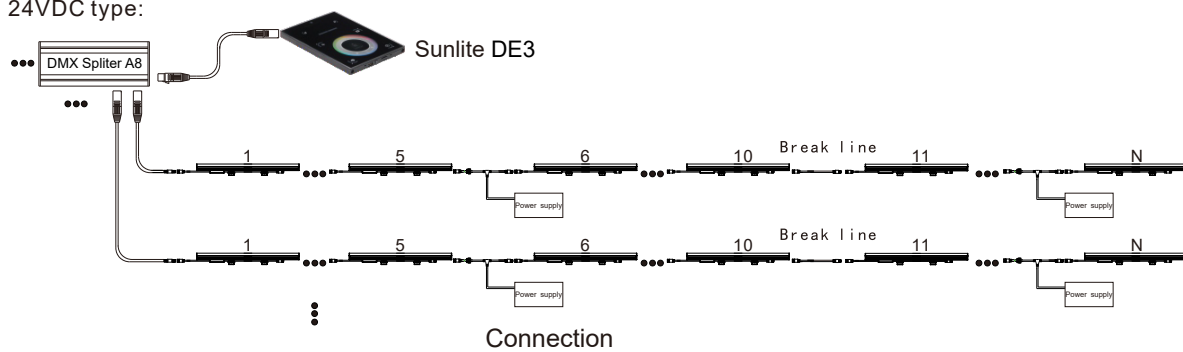

100~277V type:

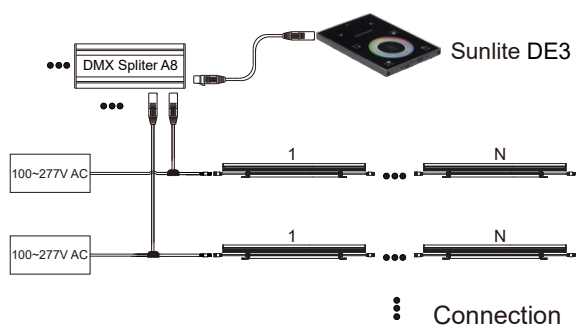

Mode No	Voltage	Power connection (MAX)	Voltage	Power connection (MAX)	Signal Connection (RGBW:40CH/4ft)
BORES ULTRASLIM PRO OPAL 1220mm DMX	24V DC	5 PCS	100~277 V AC	17 PCS(100~120V) 39 PCS(220~277V)	12 PCS
BORES ULTRASLIM PRO OPAL 615mm DMX	24V DC	10 PCS	100~277 V AC	35 PCS(100~120V) 78 PCS(220~277V)	24 PCS
BORES ULTRASLIM PRO OPAL 313mm DMX	24V DC	20 PCS	100~277 V AC	71 PCS(100~120V) 157 PCS(220~277V)	42 PCS
BORES ULTRASLIM PRO OPAL 1220mm	24V DC	5 PCS	100~277 V AC	17 PCS(100~120V) 39 PCS(220~277V)	-
BORES ULTRASLIM PRO OPAL 615mm	24V DC	10 PCS	100~277 V AC	35 PCS(100~120V) 78 PCS(220~277V)	-
BORES ULTRASLIM PRO OPAL 313mm	24V DC	20 PCS	100~277 V AC	71 PCS(100~120V) 157 PCS(220~277V)	-
BORES ULTRASLIM PRO OPAL 1000mm DMX	24V DC	5 PCS	100~277 V AC	20 PCS(100~120V) 45 PCS(220~277V)	16 PCS
BORES ULTRASLIM PRO OPAL 502mm DMX	24V DC	10 PCS	100~277 V AC	40 PCS(100~120V) 90 PCS(220~277V)	32 PCS
BORES ULTRASLIM PRO OPAL 1000mm	24V DC	5 PCS	100~277 V AC	20 PCS(100~120V) 45 PCS(220~277V)	-
BORES ULTRASLIM PRO OPAL 502mm	24V DC	10 PCS	100~277 V AC	40 PCS(100~120V) 90 PCS(220~277V)	-